




## TS1502 Wireless Alphanumeric LED Display

The TS1502 is a wireless alphanumeric LED display that provides easy time and message viewing to accommodate a wide variety of application environments. Each TS1502 wireless display is assigned a unique ID code to receive its own addressable messages. The TS1502 can also be assigned additional codes to receive group messages with other LED displays.

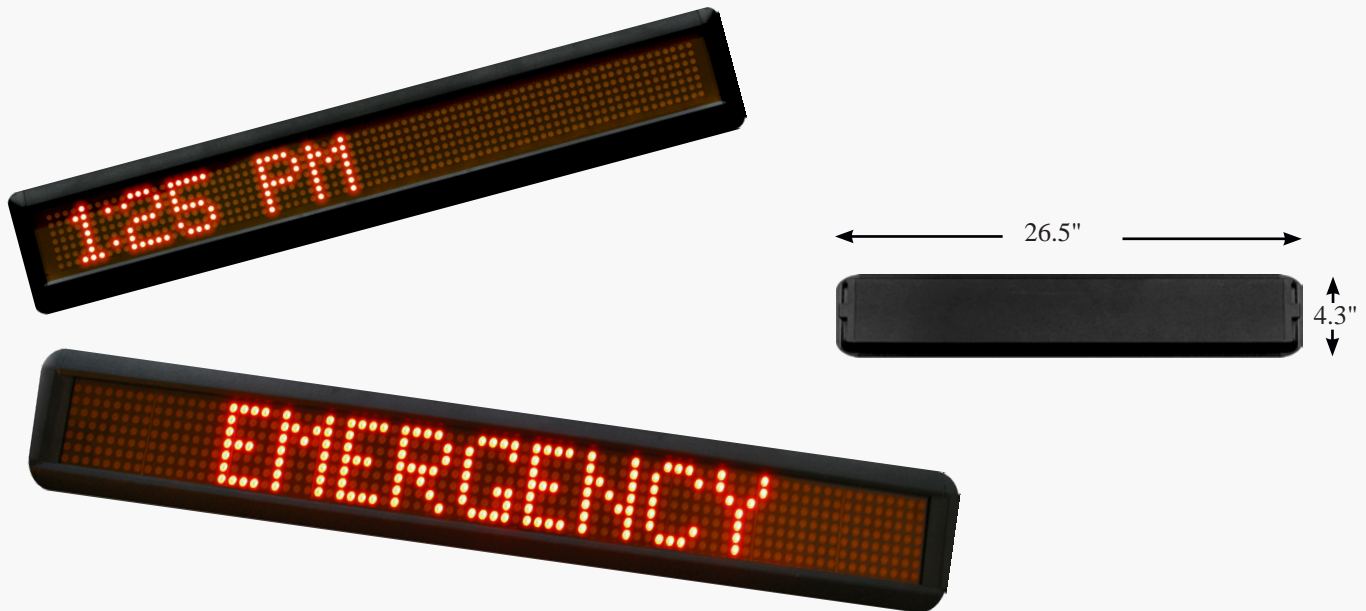

### Specifications:

<b>Dimensions:</b>	26.5"L x 4.3"H x 1.5"D	<b>LED size &amp; color:</b>	2.1" Red
<b>Weight:</b>	2.80 lb.	<b>Frequency:</b>	148-174MHz, 400-470MHz
<b>Power:</b>	120VAC, 60Hz 30-Watt 5V / 3A Power Adaptor	<b>Paging format:</b>	POCSAG, Narrow band
<b>Operating Temperature:</b>	32° to 120°F	<b>Data Baud rate:</b>	512 or 1200 BPS
<b>Humidity:</b>	0%-95% Non-condensing	<b>Receiver Sensitivity:</b>	10uV/M
<b>Frame and lens:</b>	Black metal frame with clear acrylic lens	<b>Channel spacing</b>	12.5KHz
<b>Viewing distance:</b>	Up to 80 feet	<b>Paging addresses:</b>	Six capcodes
<b>Data format:</b>	One line - up to 16 characters	<b>Limited Warranty</b>	One-year Parts and Labor