



TS2030 Wireless In-Wall / In-Ceiling Public Address Speaker



Solutions for:

- *Schools*
- *Manufacturing Plants*
- *Military Bases*
- *Campuses*
- *Government Facilities*
- *Office Buildings*
- *Medical Centers*
- *Shopping Malls*

The TS2030 is a wireless Public Address speaker that is specifically designed for in-wall/ceiling mount installations. This speaker is ideal for many applications where the installation of traditional hard-wired speakers would be impractical or impossible. This TS2030 speaker may be used independently or to enhance existing bell and Public Address systems.

The TS2030 speaker can be activated individually or as a part of a group, allowing you to play bell and alert tones, send pre-programmed voice messages, and make live voice announcements. The speaker volume can be remotely set to one of four levels with each activation. The TS2030's setup parameters can be reprogrammed over-the-air from the main encoder/transmitter.

The TS2030 is available with an internal power backup option, for uninterrupted operation during a power outage.


Features:

- *Easy in-wall/ceiling installation*
- *Built-in 30-Watt audio amplifier*
- *Wireless Public Address messaging*
- *Group and zone paging*
- *Designed for indoor installations*
- *Built-in preprogrammed alert tones*
- *Remote speaker volume control*
- *Internal power backup battery*

Technical Specifications

TS2030

Paging Format:	POCSAG 512/1200 BPS, voice and data with optional secured communication mode. Six capcodes for individual and group/zone paging.	Memory:	Eight (8) internal pre-programmed alert / bell tones and voice prompts. Optional voice storage for up to 20 user programmable messages.
Audio:	30-Watt - covers up to 500SF	Interface:	Built-in RS-232 port for PC programming and setup.
Frequency Response:	50Hz - 16KHz (100Hz - 3400Hz in a live voice mode)	Temperature:	32° to 120°F
RF Band:	FM, narrow band, VHF 148 -174MHz and UHF 400 - 470MHz	Power:	Operates from a 12VDC 3A AC power adaptor.
Power Backup:	Internal battery option that can provide power for up to 48 hours in standby mode and 60 minutes in full power continuous activation mode.	Weight:	Speaker:2.8 lb. Control Box: 2.15 lb. (2.90 lb. with internal battery)
Color:	White (paint able grill)	Dimensions:	Speaker: 7.8" Diameter x 3.2" Deep, Control Box: 7.5" wide x 5.1" high x 2.7" deep. Cutout size: 6.75" Dia.

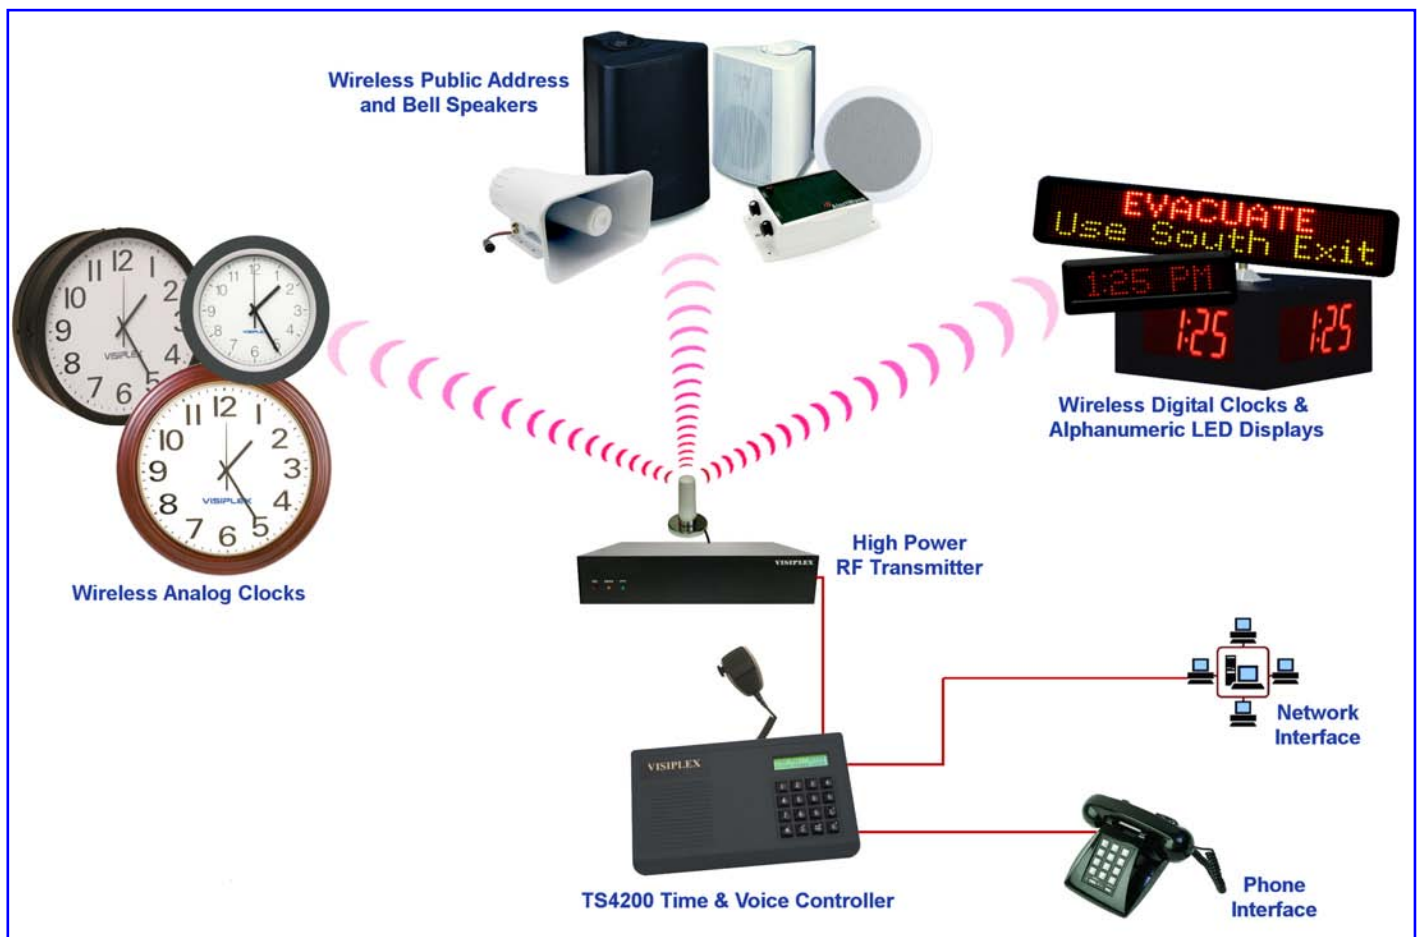

TimeSync - Wireless Time & Voice Synchronization System

VISIPLX

877 918-8463
www.timesyncpro.com